


# COMBILIFT – MODEL C4500 -SPECIFICATION-

Ref.	Description	Standard
1a	Max. Lift Height	4040mm
1b	Freelift Height	0mm
2	Height Mast Closed	2855mm
3	Max. (Mast raised)	4870mm
4	Overall Length	2500mm
5	Mast Travel	1450mm
6	Ground Clearance Under Mast	150mm
7	Ground Clearance to Centre of Wheelbase	200mm
8	Height Over Cab (Without work - lights)	2435mm
9	Width	2190mm
10	Outside Spread of Fork Arms	1350mm
11	Track Front	1980mm
12	Frame Opening	1400mm
13	Load Centre Distance	600mm
14	Overhang Front	245mm
15	Wheelbase	2115mm
16	Overhang Back	140mm
17	Length From Face of Fork	1150mm
18	Approach Angle	45°
19	Ramp Angle	29°
20	Departure Angle	45°
21	Forward Tilt	3°
22	Backward Tilt	5°
23	Minimum Outside Radius	2490mm
24	Platform Height	545mm
25	Platform Length	1350mm
A	Capacity	4500kg
B	Unladen Weight	6450kg
C	Maximum Ground Speed	15km/h
D	Gradability	15%
E	Kubota V2403 T Diesel / 3 ltr GM LPG	44kW / 48kW
F	Electric's	12 Volt
G	Fork Section	50mm x 150mm x 1350mm
H	200/50 x 10 Front Tyre	OD 450mm / Width 200mm
I	27 x 10 - 12 Rear Tyre	OD 680mm / Width 255mm
J	Standard Colour	Green & Grey
K	Suspension Seat	KAB Model 116

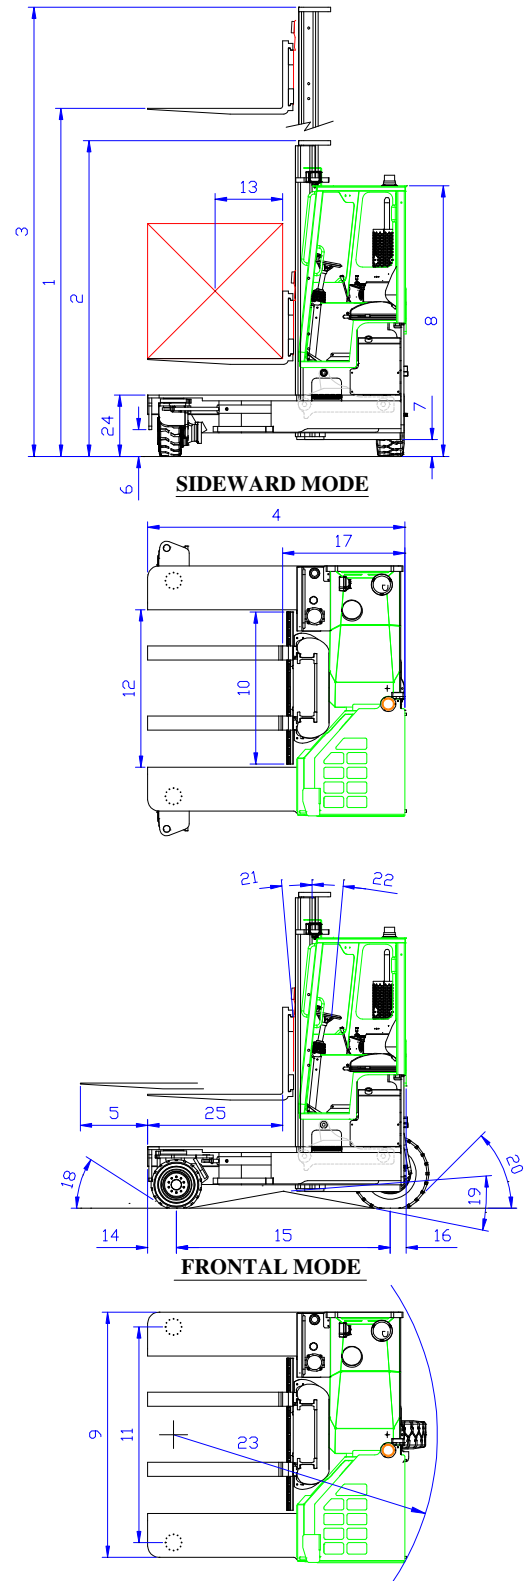

### Features include

- Rubber Mounted Cabin
- Load Sensing Steering
- 4-way lever positioning of Wheels
- Multi-Direction Operation
- 2 Wheel Hydrostatic Drive
- AC Motor Technology

Revision date: 01/01/2009



**COMBILIFT LTD.**  
**Co. Monaghan.**  
**Ireland**  
**Tel. +353 47 80500**