


COMBILIFT – MODEL C5000E -SPECIFICATION-

| Ref. | Description | Standard |
|------|---|------------------------|
| 1a | Max. Lift Height | 4530mm |
| 1b | Freelift Height | 0mm |
| 2 | Height Mast Closed | 3100mm |
| 3 | Max. (Mast raised) | 5360mm |
| 4 | Overall Length | 2500mm |
| 5 | Mast Travel | 1450mm |
| 6 | Ground Clearance Under Mast | 150mm |
| 7 | Ground Clearance to Centre of Wheelbase | 200mm |
| 8 | Height Over Cab (Without work - lights) | 2585mm |
| 9 | Width | 2260mm |
| 10 | Outside Spread of Fork Arms | 1350mm |
| 11 | Track Front | 1965mm |
| 12 | Frame Opening | 1400mm |
| 13 | Load Centre Distance | 600mm |
| 14 | Overhang Front | 230mm |
| 15 | Wheelbase | 2135mm |
| 16 | Overhang Back | 135mm |
| 17 | Length From Face of Fork | 1150mm |
| 18 | Approach Angle | 45° |
| 19 | Ramp Angle | 17° |
| 20 | Departure Angle | 45° |
| 21 | Forward Tilt | 3° |
| 22 | Backward Tilt | 5° |
| 23 | Minimum Outside Radius | 2525mm |
| 24 | Platform Height | 495mm |
| 25 | Platform Length | 1350mm |
| A | Capacity | 5000kg |
| B | Unladen Weight | 6800kg |
| C | Maximum Ground Speed | 10 km/h |
| D | Gradability | 10% |
| E | Battery Capacity (V / Ah) | 72V / 775Ah |
| F | Fork Section | 50mm x 150mm x 1350mm |
| G | 16 x 7 – 10.5 Front Tyre (Solid Rubber) | OD 406mm / Width 178mm |
| H | 27 x 10-12 Rear Tyre | OD 680mm / Width 255mm |
| I | Standard Colour | Green & Grey |
| J | Suspension Seat | KAB Model 116 |

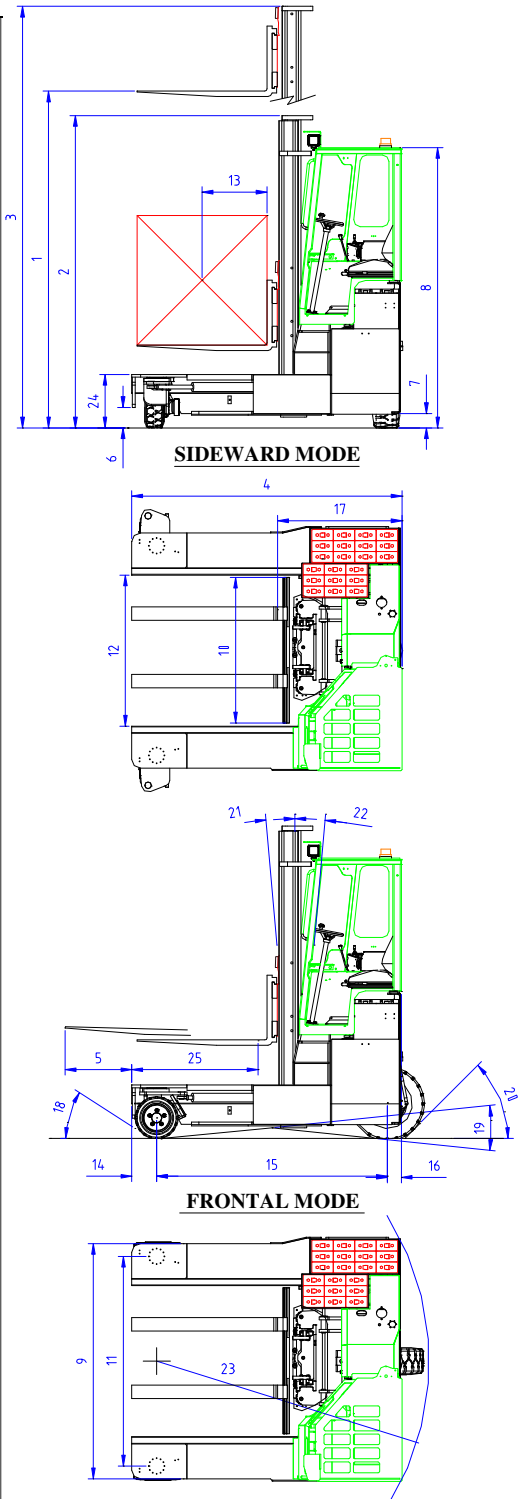

Features include

- Rubber Mounted Cabin
- Load Sensing Steering
- 4-way lever positioning of Wheels
- Multi-Direction Operation
- 2 Wheel Hydrostatic Drive
- AC Motor Technology

Revision date: 01/01/2009



COMBILIFT LTD.
Co. Monaghan.
Ireland
Tel. +353 47 80500