


# COMBILIFT – MODEL C4000E -SPECIFICATION-

Ref.	Description	Standard
1a	Max. Lift Height	4530mm
1b	Freelift Height	0mm
2	Height Mast Closed	3100mm
3	Max. (Mast raised)	5360mm
4	Overall Length	2300mm
5	Mast Travel	1300mm
6	Ground Clearance Under Mast	150mm
7	Ground Clearance to Centre of Wheelbase	200mm
8	Height Over Cab (Without work - lights)	2585mm
9	Width	2260mm
10	Outside Spread of Fork Arms	1350mm
11	Track Front	1965mm
12	Frame Opening	1400mm
13	Load Centre Distance	600mm
14	Overhang Front	230mm
15	Wheelbase	1935mm
16	Overhang Back	135mm
17	Length From Face of Fork	1100mm
18	Approach Angle	45°
19	Ramp Angle	17°
20	Departure Angle	45°
21	Forward Tilt	3°
22	Backward Tilt	5°
23	Minimum Outside Radius	2350mm
24	Platform Height	495mm
25	Platform Length	1200mm
A	Capacity	4000kg
B	Unladen Weight	6450kg
C	Maximum Ground Speed	10km/h
D	Gradability	10%
E	Battery Capacity ( V / Ah)	72V / 775Ah
F	Fork Section	50mm x 150mm x 1200mm
G	16 x 7 – 10.5 Front Tyre (Solid Rubber)	OD 406mm / Width 178mm
H	27 x 10-12 Rear Tyre	OD 680mm / Width 255mm
I	Standard Colour	Green & Grey
J	Suspension Seat	KAB Model 116

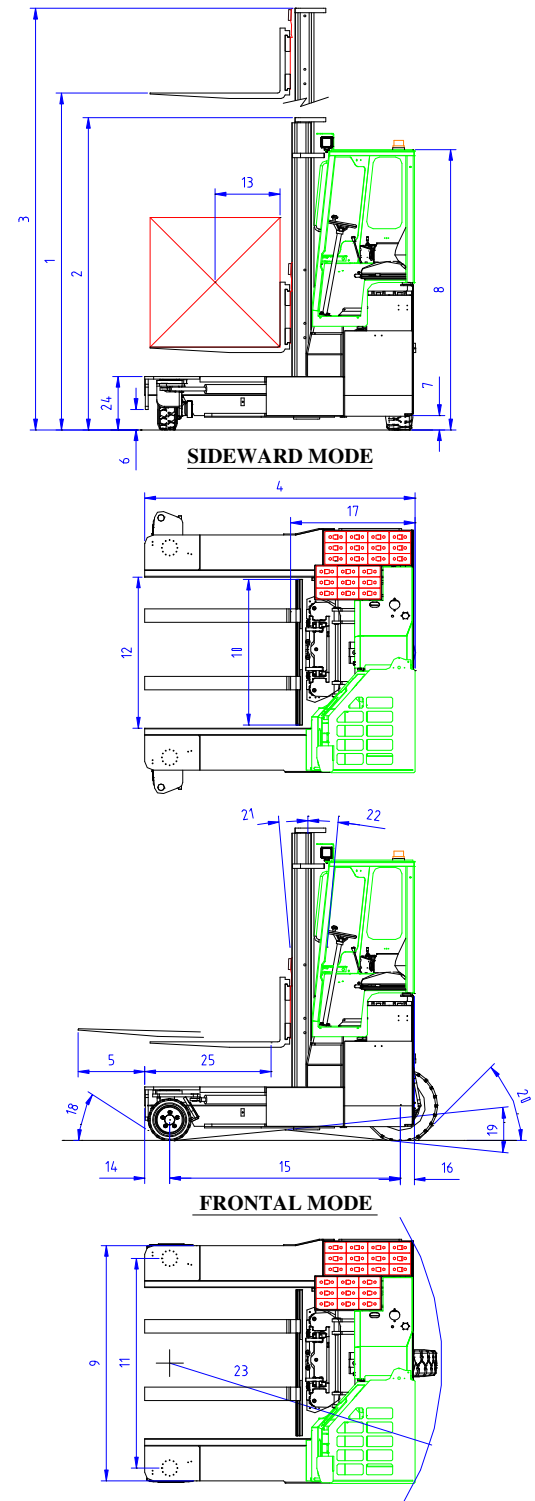

## Features include

- Rubber Mounted Cabin
- Load Sensing Steering
- 4-way lever positioning of Wheels
- Multi-Direction Operation
- 2 Wheel Hydrostatic Drive
- AC Motor Technology

Revision date: 01/01/2009



**COMBILIFT LTD.**  
**Co. Monaghan.**  
**Ireland**  
**Tel. +353 47 80500**